

INDUSTRIAL MANNEQUINS



MAN-PA-A / MAN-PA-V

FEATURES

MAN-PA-A/MAN-PA-V

With air-operated waistband and leg stretching device, for central steam and compressed air supplies.

Side waistband stretching device.

Height adjustable leg stretching carriage and leg clamps made of stainless steel.

Built-in three phases fan. Air heating device.

Electronic card for the setting of 9 ironing cycles in total.

Ironing cycle controlling: steaming time, steam/air time, drying time.

Three pressure regulators (for leg clamps, waistband stretcher and leg stretching carriage).

Switch for the exclusion of the leg stretching carriage.

Manual size indicator.



Mechanical airflow regulator.

It needs compressed air, 5 bar- 40 NI/min.

Connection: 230/400V III 50Hz



TECHNICAL DATA	UNIT.	TOPPER-C (WITHOUT BOILER)	TOPPER-A (WITH BOILER)
GENERAL DETAILS			
Boiler	-	No	Yes
Compressor	-	No	No
Group of Iron	-	-	-
Steam gun	-	-	-
POWER			
Vacuum Motor	HP	-	-
Pump Motor	HP	-	-
Compressor motor (Mod. with option)	HP	-	-
Boiler Heater (Mod. with option)	kW	-	6
Fan motor	HP	1-1,5	1-1,5
CONNECTIONS			
Ø Water inlet	BSP	-	-
Ø Steam inlet	BSP	3/8"	-
Ø Condensate outlet	BSP	3/8"	-
Steam pressure	BAR	5	5
Steam Consumption	Kg/h	15-20	-
Ø Air inlet	BSP	1/4"	1/4"
Ø Air pressure	BAR	5	5
Ø Air Consumption	NI/m	40	40
DIMENSIONS / PACKING DIMENSIONS			
Width / Width	mm	1.115/1.210	1.115/1.210
Depth / Depth	mm	630/780	630/780
Height / Height	mm	1.950/2.100	1.950/2.100
Net weight / Gross weight	kg	119/175	165/225
Volume	m ³	1,37/1,98	1,37/1,98
OTHERS			
Voltage	Hz	230/400V III 50/60	230/400V III 50/60
Sound level	dB	70	70

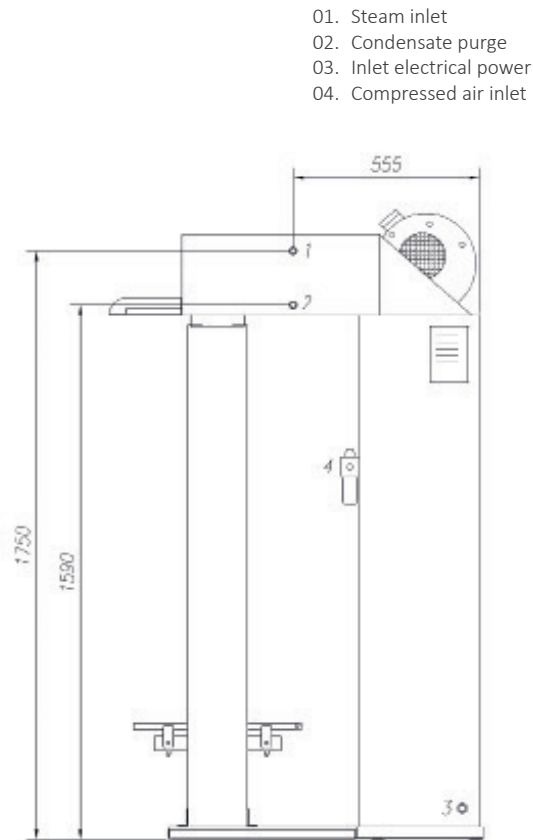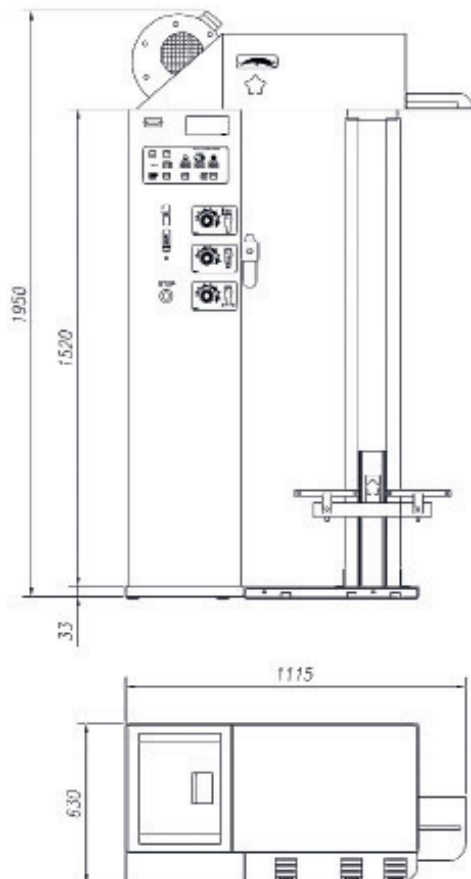

01. Steam inlet
02. Condensate purge
03. Inlet electrical power
04. Compressed air inlet

