

# FLATWORK DRYER IRONER Ø200

## C-140/20

### ELECTRONIC CONTROL

Simple and user friendly: selection of ironing speed and temperature by push buttons

### EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure  
Automatic shutdown at 80°C  
Fumes circulation circuit from the bottom reducing energy consumption

### ROBUSTNESS

Roll driving by speed inverter  
Nomex quality feeding and ironing belts:  
high temperatures resistant

### ERGONOMICS

Acoustic comfort : <65 dB  
Appropriate operating height: 990 mm feeding belts  
Minimal encumbrance: space saving, suitable for most spaces

### MAINTENANCE

Easy access to all components on both sides of the machine  
Basic connections : electrical connection and air extraction  
Dimensions of all models without trays narrower than a door frame: 546 mm

### OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation  
Front feeding and return  
Built-in cool down system  
Polished steel roll Ø 200 mm  
Working width: 1400 mm  
Electric heating  
Frequency Inverter for the ironing speed control.


### OPTIONS

Marine tension 440V III 60 Hz without N  
Tension 230V III 50-60 Hz



TECHNICAL DATA	UNIT.	C-140/20	
<b>GENERAL DETAILS</b>			
Theoretical production *	Kg/h	12-14	
Theoretical production radiant gas *	Kg/h	-	
Evaporation power	Kg/h	8-10	
Ø Roll	mm	200	
Working width	mm	1.400	
Height of feeding belts	mm	990	
Ironing speed	mt/min	1 - 5	
Control		ELECTRONIC	
No programs	Nº	7	
Rear exit + length folder		NO	
<b>POWER</b>			
Electric heating	kW	10,5	
Total electric power (Elec. model)	kW	10,84	
Gas heating	kW	-	
Total electric power (Gas model)	kW	-	
Steam heating	kW	-	
Total electric power (Steam model)	kW	-	
Roll motor	kW	0,25	
Fan motor	kW	0,09	
Add. elec. power with folder	kW	-	
Add. elec. power with folder + rear exit	kW	-	
<b>CONNECTIONS</b>		<b>ELECTRIC</b>	<b>GAS</b>
Tension 230V - III + T	Nºxmm2/A	4 x 6 / 32A	-
Tension 400V - III + N + T	Nºxmm2/A	5 x 4 / 20A	-
Ø gas inlet	BSP	-	-
Ø steam inlet	BSP	-	-
Ø condensed (steam model)	BSP	-	-
<b>DIMENSIONS / PACKING DIMENSIONS</b>			
Net width / Gross width	mm	1.878 / 2.130	
Net depth / Gross depth	mm	444 / 770	
Net height / Gross height	mm	1.335 / 1.570	
Net weight / Gross weight	Kg	180 / 220	
Volume	m3	2,57	
<b>OTHERS</b>			
No fume outlet	Nº	1	
Ø Extraction	mm	83	
Air flow	m3/h	300	
Noise Level	dB	55	

\*45 %-25 % moisture

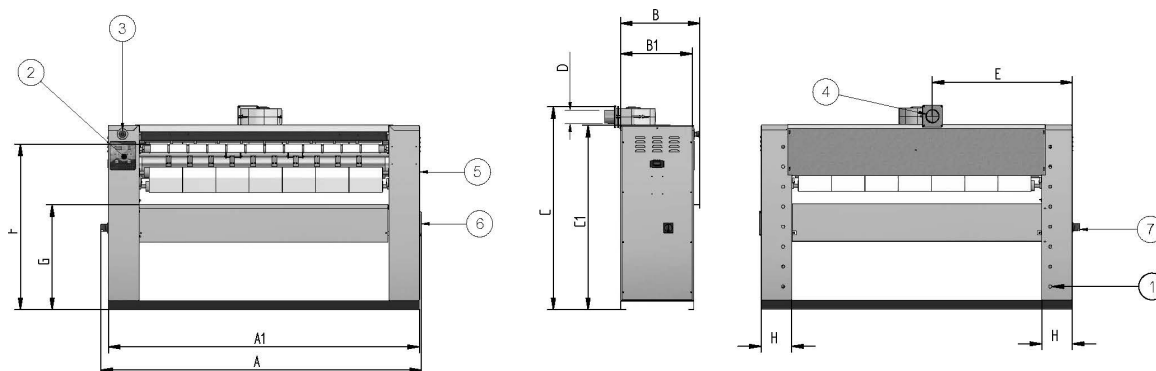

- 01. Electrical connection
- 02. Control panel
- 03. Emergency stop
- 04. Exhaust
- 05. Crank contactor
- 06. Crank
- 07. Main switch

	A	B	C	A1	B1	C1	D	E	F	G	H	I
C-140/20	1.885	448	1.335	1.878	444	1.110	83	1.020	1.000	635	21	-

