


# CROSS FOLDER AND STACKER 2000 // 2600 // 3300



## FEATURES

Independent cross folder with stacker.

- Speed 9mt/min.
- 1 crossfold working lanes
- Crossfolds by air jet and rotating rolls
- Touch-screen control panel
- 20 variable programs with PLC
- Selection chance of side and exit direction of stacker conveyor
- Transportation belts in cotton
- Safety alarm for cross-folds obstructions
- Calculation of partial and total production
- Totally personalized foldin parameters
- Stacking chance from 1 to 10

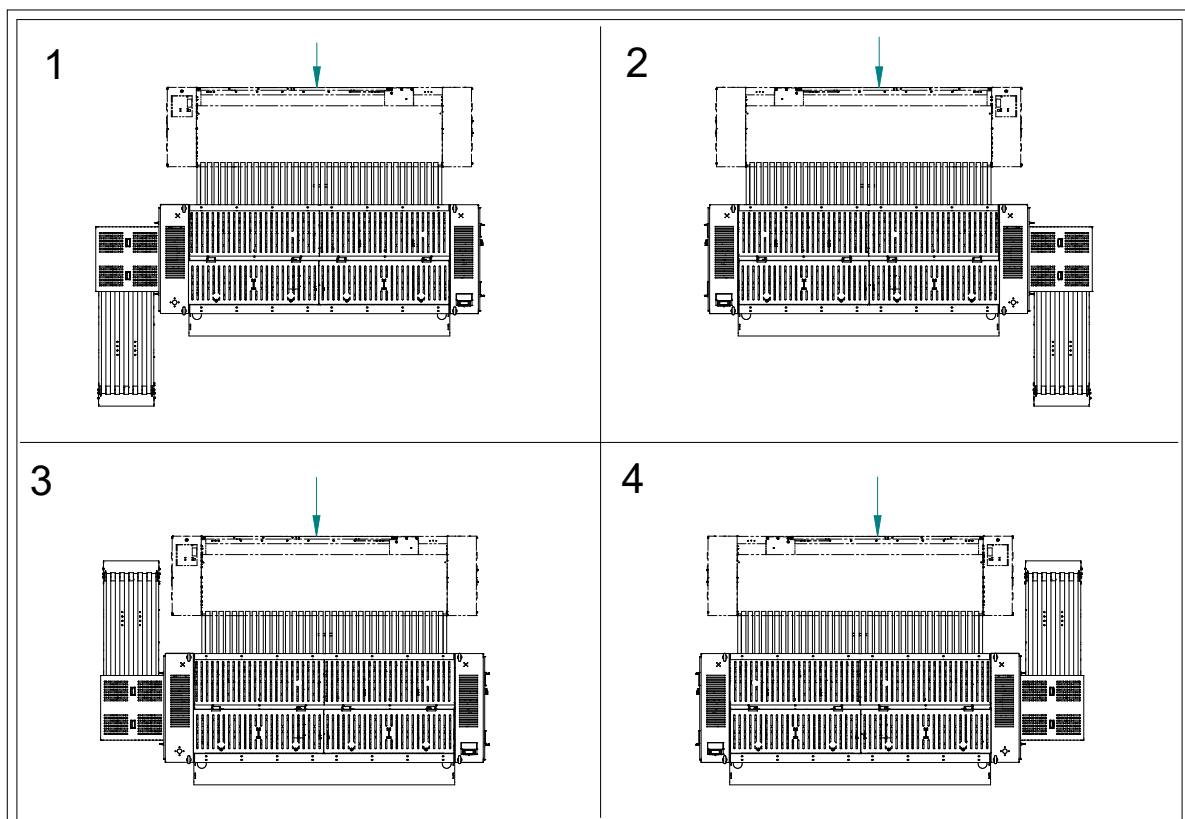

TECHNICAL DATA	UNIT.	2000	2600	3300
<b>GENERAL DATA</b>				
Working width	mm	2000	2600	3300
Ironing speed	mt/min	9	9	9
Nº of programmes	-	20	20	20
<b>FOLDING</b>				
1 lane- crossfold	Nº	1-2-3	1-2-3	1-2-3
<b>POWER</b>				
Power	kW	1,5	1,5	1,5
Voltage 400V- III + N + T	Hz	50Hz // Amp 3,7	50Hz // Amp 3,7	50Hz // Amp 3,7
Voltage 230V-III + T	Hz	50Hz // Amp 6,3	50Hz // Amp 6,3	50Hz // Amp 6,3
<b>FOLDER DIMENSIONS / PACKAGING DIMENSIONS</b>				
Net width / gross width	mm	3.010 / 3.110	3.460 / 3.560	4.160 / 4.260
Net depth / gross depth	mm	1.920 / 2.020	1.920 / 2.020	1.920 / 2.020
Net height / gross depth	mm	1.240 / 1.340	1.240 / 1.340	1.240 / 1.340
Net / gross weight	Kg	1.150 / 1.200	1.400 / 1.450	1.680 / 1.730
<b>STACKER DIMENSIONS / PACK DIMENSIONS</b>				
Net width / gross width	mm	710 / 810	710 / 810	710 / 810
Net depth / gross depth	mm	1700 / 1800	1700 / 1800	1700 / 1800
Net height / gross depth	mm	620 / 720	620 / 720	620 / 720
Net weight / gross weight	Kg	180 / 210	180 / 210	180 / 210
<b>OTHERS</b>				
Compressed air needed (6,5 bar)	NI/h	3500	3500	3500

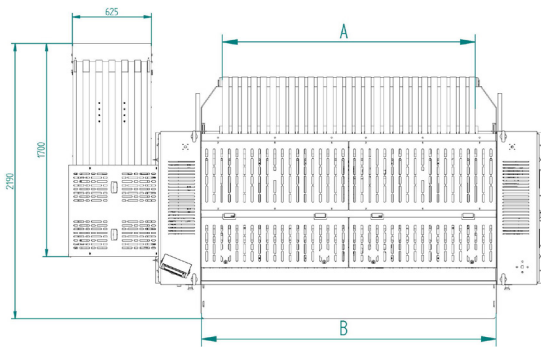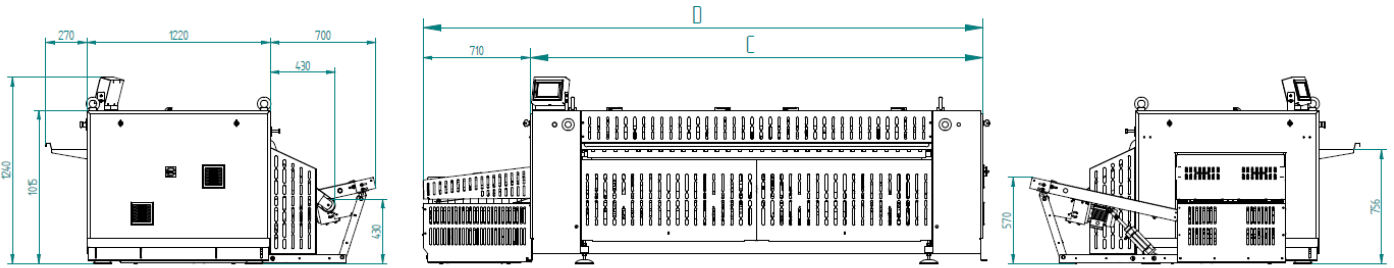

	A	B	C	D
CPL CROSS 2000	2000	2330	3010	3720
CPL CROSS 2600	2600	2780	3460	4170
CPL CROSS 3300	3300	3480	4160	4870

