

# DEB - EXCELLENCE (HEAT PUMP) TUMBLE DRYERS

## T2 CONTROL

User friendly and totally programmable 7" T2 USB Connection. PC software free of charge for programming, traceability, data analysis... Videos on display (ads, instructions, etc.) 37 languages

## OUTSTANDING FEATURES

Reversing drum action as standard  
Stainless steel drum as standard  
Frequency inverter as standard

## EFFICIENCY

DUAL AIRFLOW- New 'optimized' system of mixed airflow  
Big fluff filter  
Double door glass

## CONNECTIVITY

IoT Primerlink  
Managemnt of laundries: OPL and COIN  
Remote payment



## VERSATILITY

Make to order- customisation

WET CLEANING

OPL > Multivending- Standard OPL model easily trasformable to coin laundry uses



## ERGONOMICS

Drawer as fluff filter, made of stainless steel  
Biggest door diameters



## MAINTENANCE

Hinged panel: easy and ergonomic access

Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance



## OTHERS

Grey skinplate outer casing, stainless steel look

EFFICIENT DRUM- new drum with stamped holes

COOL DOWN- anti-wrinkle at the end of the cycle

No need of exhaust to the exterior

Low energy consumption

Water to refrigerate, which may be reused to wash

CE approved



## OPTIONS


- Reverse door opening
- New dosing/vaporizing system
- Primerlink communication kit IoT
- Rear panel external air + filter
- Stainless steel outercasing
- Stainless steel frontal panel
- Wooden packing
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA	UNIT.	DEB-11 T2	DEB-17 T2	DEB-23 T2
<b>CAPACITY</b>				
Capacity 1/18	Kg	12	18	26
Capacity 1/20	Kg	11	17	23
Capacity 1/30	Kg	7	11	15
Hourly Output*	Kg/h	15	18,9	22,9
Evaporation capacity*	l/h	7,5	9,5	11,5
<b>DRUM</b>				
Ø Drum	mm	750	750	855
Drum length	mm	475	746	800
Drum volume	l	210	330	460
Ø Loading door	mm	574	574	574
<b>POWER</b>				
Drum motor power	kW	0,37	0,37	0,37
Fan motor power	kW	0,55	0,55	0,55
Electric heating power ALL RANGES	kW	3,8 + 4***	3,8 + 4***	3,8 + 4***
Total electric power (elec.model) EXCELLENCE HP	kW	8,77	8,77	8,77
Energetic consumption	** kWh/ l	1,28	1,17	1,05
Nominal airflow	m3/h	1.200	1.200	1.200
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>ELECTRICAL</b>	<b>ELECTRICAL</b>
Tension 400V - III + N + T (50 Hz)	Nº x mm2 / A	5 x 4 / 20	5 x 4 / 20	5 x 4 / 20
Heat pump inlet (Cooling)	BSP	1/2 "	1/2 "	1/2 "
Heat pump outlet (Cooling)	BSP	1/2 "	1/2 "	1/2 "
Drain	BSP	3/4 "	3/4 "	3/4 "
<b>DIMENSIONS / PACKING DIMENSIONS</b>				
Net width / Gross width	mm	785 / 865	785 / 865	890/970
Net Depth / Gross Depth	mm	1.255/ 1.380	1.525 / 1.650	1.595/1.720
Net Height / Gross Height	mm	1.694 / 1.840	1.694 / 1.840	1.812 / 1.940
Net weight / Gross weight	Kg	342 / 356	357/ 372	380/395
<b>OTHERS</b>				
Sound level	dB	64	64	64

\* It may vary depending on the type of heating, filter cleanliness or extraction type

\*\* kWh per litre of evaporated water

\*\*\* Compressor + resistances

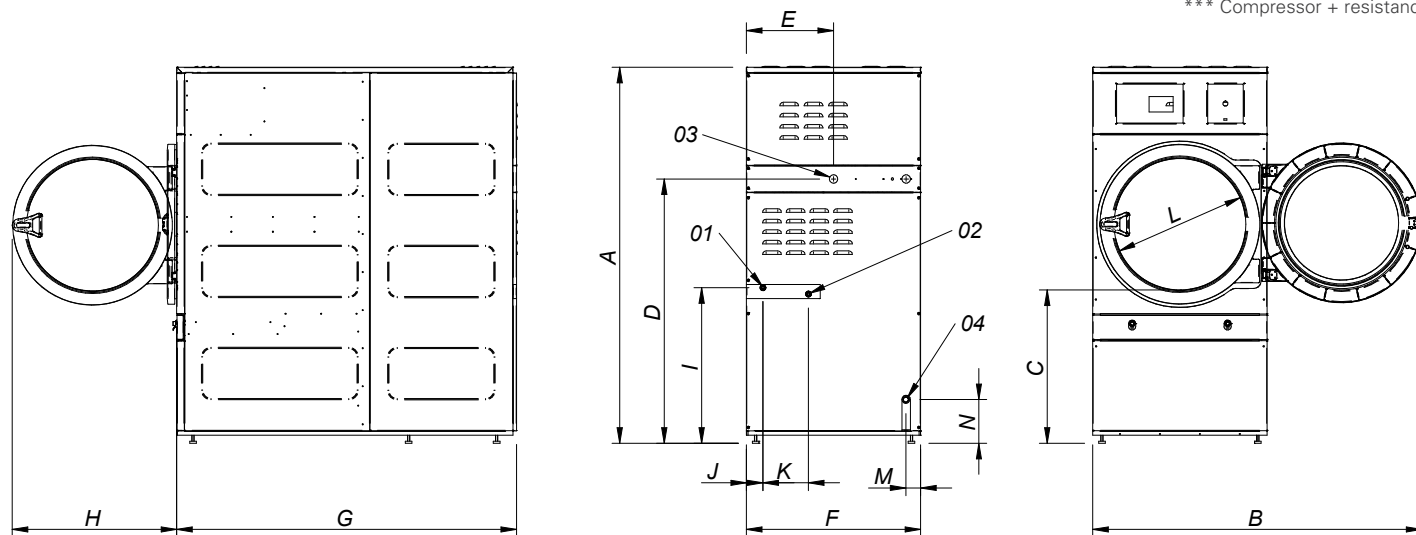

- 01 REFRIGERATION WATER INLET 1/2"
- 02 REFRIGERATION WATER OUTLET (HOT) 1/2"
- 03 ELECTRIC CONNECTION
- 04 DRAIN 3/4"

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
DEB-11 T2	1694	1447	689	1190	392	785	1255	735	700	75	205	575	67	197
DEB-17 T2	1694	1447	689	1190	392	785	1525	735	700	75	205	575	67	197
DEB-23 T2	1812	1552	743	1190	445	890	1595	735	700	127	205	575	119	250

