



Primer

LP-8 / 10 T2

PROFESSIONAL WASHER EXTRACTORS



VERSATILITY

OPL < > COIN
 ELECTRIC < > HOT WATER
 PUMP < > DRAIN VALVE
 SINGLE < > STACKED
 Wet cleaning features ready
 Suitable for many sectors:
 restaurants, gyms, campings, mop cleaning, apartments,
 coin laundries, dry cleaners, nurseries...



OUTSTANDING FEATURES

User-friendly and totally programmable T2 microprocessor with a 4,3" touch screen.
 2 water inlets
 8 dosing signals as standard.
 USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT
 Short washing cycles (Heating Power 6 kW).



CONNECTIVITY

IoT - PRIMERLINK standard.
 Management of laundries: OPL and COIN
 Remote payment



EFFICIENCY

Water saving: automatic adjustment of water and chemicals
 Intelligent weighing system: automatic adjustment of water and chemicals.
 Optimal KG: manual indication of the laundry weight.



ROBUSTNESS

Outer casing in grey skinplate.
 Robust aluminium door.
 AISI-304 stainless steel inner drum, outer drum and ribs.
 No inner drum seal (muffle), easy to repair and clean.
 Industrial house bearing and bearings (Up to 20,000 working hours) and possibility to replace bearings.
 Same motor and inverter as PRIMER industrial washers LS.
 Industrial and heavy duty doorlock.



OTHERS


Free standing washers (leveling feet included).
 Detergent box with 4 compartments
 Frequency inverter to control imbalances.
 CB, WRAS approved product.



OPCIONES

- **NEW** Dosing pump kit DQ-2
- Extra dosage pump DB-1. Extra individual pumps
- Double drain kit
- Drain-pump kit
- Normally closed valve
- 6 extra dosing signals for dosing pumps
- Door silicone gasket
- Reversing door opening
- Tropicalized model: protected board
- AISI 304 stainless steel outer casing
- Top soapbox
- Plinth for better ergonomics (loading height)
- Plinth for mops, filter included (only model with valve)
- Plinth for water recovery
- Coin kits: token/coins meter + box, central pay
- Order in complete container + compact packing
- Auto unlock kit for the door (in case of power failure)
- Ship tension 440V III 60Hz no N

TECHNICAL DATA	UNIT.	LP-8-V	LP-8-P	LP-10-V	LP-10-P				
DRUM									
Load capacity 1:9 / 1:10	Kg	9/8	9/8	11/10	11/10				
Volume	l	80	80	100	100				
Diameter	mm	532	532	532	532				
Depth	mm	360	360	425	425				
GENERAL DETAILS									
Washing speed / Spinning speed	r.p.m.	50/ 1.250	50/ 1.250	50/ 1.250	50/ 1.250				
G Factor	-	450	450	450	450				
Maximum force transmitted	KN	1,47 ± 0,53	1,47 ± 0,53	1,57 ± 0,53	1,57 ± 0,53				
Frequency-dynamic force	Hz	18,33	18,33	18,33	18,33				
Coin laundry version	-	✓	✓	✓	✓				
Double drain	-	X	X	✓	X				
Noise level	dB	<70	<70	<70	<70				
Weighing / Tilting system	-	X / X	X / X	X / X	X / X				
DOOR									
Height center door / Height base door	mm	537/280	537/280	537/280	537/280				
Diameter	mm	373	373	373	373				
POWER									
Motor	kW	0,75	0,75	0,75	0,75				
Electric heating power	kW	6	6	6	6				
Total electric power (electric model)	kW	6,25	6,25	6,25	6,25				
Total electric power (hot water model)	kW	0,75	0,75	0,75	0,75				
CONEXIONES									
Tension 230V I+N+T 50/60Hz	N° x mm2/A	2x6+T - 40A	2x1,5+T 16A	2x6+T - 40A	2x1,5+T 16A	2x6+T - 40A	2x1,5+T - 16A	2x6+T - 40A	2x1,5+T - 16A
Tension 230V III+T 50/60Hz	N° x mm2/A	3x2,5+T - 20A	-	3x2,5+T - 20A	-	3x2,5+T - 20A	-	3x2,5+T - 20A	-
Tension 400V III+N+T 50/60Hz	N° x mm2/A	4x1,5+T - 16A	-	4x1,5+T - 16A	-	4x1,5+T - 16A	-	4x1,5+T - 16A	-
Water inlet	BSP	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Drain	BSP	2"		1" (Pump)		2"		1" (Pump)	
DIMENSIONS / PACKING DIMENSIONS									
Width / width	mm	680/710	680/710	680/710	680/710				
Depth / depth	mm	698/832	698/832	742/832	742/832				
Height / height	mm	1.040/1.130	1.040/1.130	1.040/1.130	1.040/1.130				
Net weight / Gross weight	kg	140/150	140/150	150/160	150/160				
Volume	m3	0,67	0,67	0,67	0,67				

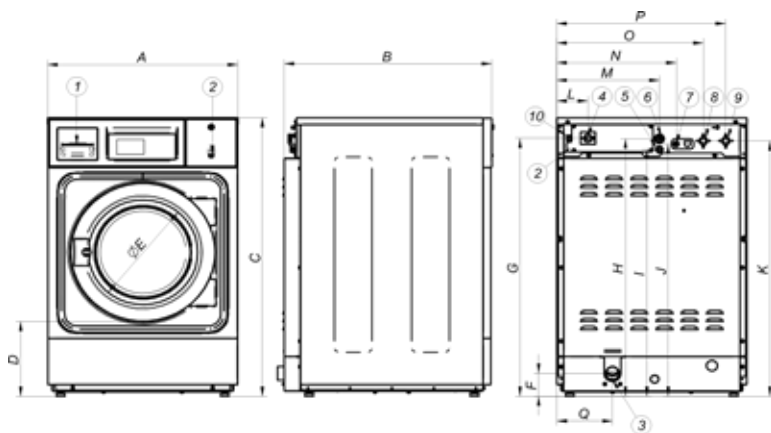

1. SOAP DISPENSER
2. USB PORT
3. DRAIN
4. MAIN SWITCH
5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. LIQUID SOAP CONNECTION
8. COLD WATER INLET
9. HOT WATER INLET
10. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
LP-8 V	680	698	1040	278	373	86	964	962	922	942	954	110	366	427	524	603	199
LP-8 P	680	698	1040	278	373	86	964	962	922	942	954	110	366	427	524	603	199
LP-10 V	680	742	1040	278	373	86	964	962	922	942	954	110	366	427	524	603	199
LP-10 P	680	742	1040	278	373	86	964	962	922	942	954	110	366	427	524	603	199

