

SPOTTING TABLES

DES-F / MINI-DES



FEATURES

DES-F

Cold spotting table with built-in suction unit.

Cold spotting table.

Featuring two cold spotting spray guns with independent circuits, two receptacles for liquids, hose support and swinging arm with suction and spotting shape out of stainless steel AISI 304.


Board out of stainless steel AISI 304.

Board dimensions: de 800x260x175 mm.

Electric connection: 230V I+N / 50-60 Hz.

With compressor: 230/400V III 50Hz.

It needs compressed air (200 NI/min).

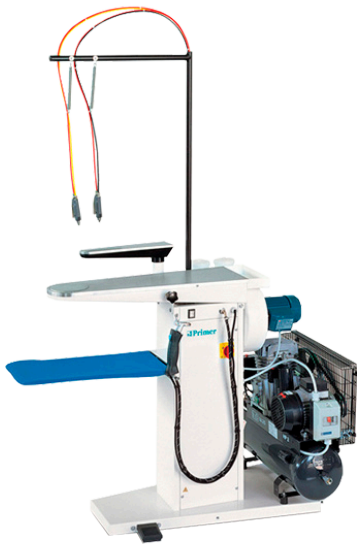

DES-F

MINI-DES


Cold spotting table with built-in suction unit.

Equipped with two receptacles for liquids and one spotting spray gun.

One working pedal.

Electric connection: 230V I+N / 50-60 Hz.

It needs compressed air.

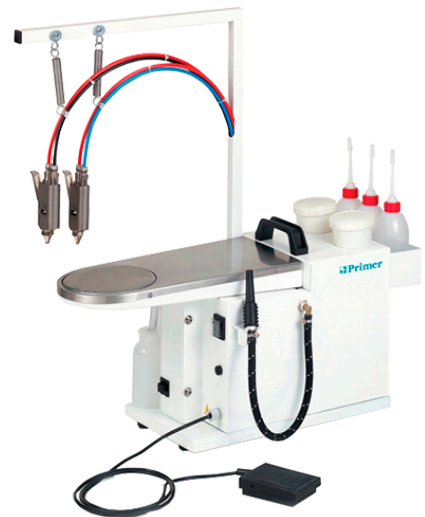

MINI-DES

OPTIONS

- Compressor for DES-F.
- Air- steam gun for DES-F.
- Trolley for MINI-DES.

TECHNICAL DATA	UNIT.	DES-F	MINI-DES
GENERAL DETAILS			
Board dimensions	mm	800 x 260 x 175	400 x 200 x 35
Boiler	-	No	No
Boiler capacity	l	-	-
Compressor	-	Opt	-
Group of Iron	-	-	-
Steam gun	-	Opt	-
Polished upper buck	-	-	-
POWER			
Vacuum Motor	HP	0,6	0,13
Pump Motor	HP	-	-
Compressor motor (Mod. with option)	HP	2	-
Boiler Heater (Mod. with option)	kW	-	-
Fan motor	kW	-	-
CONNECTIONS			
Ø Water inlet	BSP	-	-
Ø Boiler exhaust (mod. with boiler)	BSP	-	-
Ø Steam inlet	BSP	3/8"	-
Ø Condensate outlet	BSP	3/8"	-
Steam pressure	BAR	4,5	-
Steam Consumption	Kg/h	2-3	-
Ø Air inlet	BSP	1/4"	1/4"
Ø Air outlet	mm	90	-
Air pressure	BSP	4-8	6-8
Air Consumption	Nl/m	200	30
DIMENSIONS / PACKING DIMENSIONS			
Width / Width	mm	1.200/1.300-1.340 (Wooden box)	640/600
Depth / Depth	mm	650/540-960 (Wooden box)	320/450
Height / Height	mm	1.800/1.160-1.170 (Wooden box)	325-670/540
Net weight / Gross weight	kg	44 / 78 (+compres.)/58-145 (+compres.)	13/16
Volume	m ³	1,40/1,51	0,14/0,15
OTHERS			
Voltage	Hz	230V 50/60	230V 50/60
Sound level	dB	65	65

