

# WALL FLATWORK IRONERS Ø650 EXCELLENCE

## C-200/65 / C-260/65 / C-330/65

### T2


User friendly and totally programmable 7" T2  
38 available languages  
5 preset programs, possibility to create unlimited ones  
Connectivity ready  
Reverse roll standard  
USB Connection. PC software free of charge for programming, traceability, data analyses...

### EFFICIENCY

SMART IRON: automatic regulation of ironing speed according to residual moisture, energy economizer (standard)  
Automatic adjustment of ironing speed, lowered for feeding and increased for higher production up to 15 m/min. (standard)  
Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure  
Automatic shutdown at 80°C  
Fumes circulation circuit from the bottom reducing energy consumption  
Radiant gas model: production improved by 25 %  
Powerful exhaust system

### VERSATILITY

Radiant gas model: flexible, suitable for high altitude installations  
Optional built-in length folder with or without rear exit option

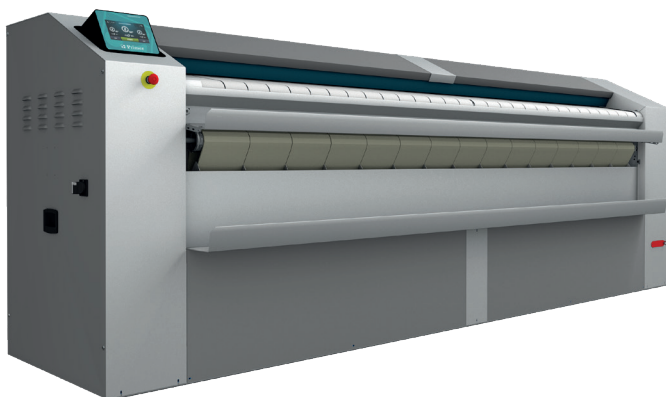

### ROBUSTNESS

Roll driving by speed inverter  
Stainless steel and grey skinplate panels  
Nomex quality feeding and ironing belts: high temperatures resistant  
Chrome plate roll as option: anticorrosive, more durable

### ERGONOMICS

Acoustic comfort : <65 dB  
Appropriate operating height: 1120 mm feeding belts  
Compact dimensions

### MAINTENANCE

Easy access to all components on both sides of the machine.  
Connections : electrical connection and air extraction  
Complete technical menu: statistics, autotest, data recovery for technician and maintenance  
Remote communication: faster intervention

### OTHERS


Dries and irons flat linen in a single operation  
Front feeding and return  
Built-in cool down system  
Polished steel roll ø 650 mm  
Working width: 2000, 2600 and 3300 mm  
Electric, radiant gas or steam heating

### OPTIONS

Built-in lengthwise folder  
Rear exit (only with folder)  
Chrome plate cylinder  
PL Cross folder CPL-CROSS  
Marine tension 440V III 60 Hz without N (electric models)  
Tension 230V III 50-60 Hz  
Maritime wooden packing

TECHNICAL DATA	UNIT.	C-200/65	C-260/65	C-330/65			
<b>GENERAL DETAILS</b>							
Theoretical production*	Kg/h	65-90	80-104	104-160			
Theoretical production radiant gas*	Kg/h	78-108	96-124	124-192			
Evaporation power	Kg/h	45-63	55-73	73-110			
Ø Roll	mm	650	650	650			
Working width	mm	2.000	2.600	3.300			
Height floor-feeding belts	mm	1.120	1.120	1.120			
Working speed	mt/min	1 - 15	1 - 15	1- 15			
Control		T2	T2	T2			
No. Programs	Nº	5	5	5			
Rear exit + length folder		OPT	OPT	OPT			
<b>POWER</b>							
Electric heating power	kW	42	54	72			
Total electric power (Electric model)	kW	43,05	55,05	73,05			
Gas heating power	kW	52	69	78			
Total electric power (Gas model)	kW	1,05	1,05	1,05			
Steam heating power	kW	60	76	97			
Total electric power (electric model)	kW	1,05	1,05	1,05			
Roll motor power	kW	0,55	0,55	0,55			
Fan motor power	kW	0,25 (gas x2)	0,25 x 2	0,25 x 2			
Folder electric power	kW	0,56	0,56	0,56			
Folder + rear exit electric power	kW	0,74	0,74	0,74			
<b>CONNECTIONS</b>		<b>ELECTRIC</b>	<b>GAS / STEAM</b>	<b>ELECTRIC</b>	<b>GAS / STEAM</b>	<b>ELECTRIC</b>	<b>GAS / STEAM</b>
Tension 230V - III + T	Nºxmm2/A	4x25/125A	4x2,5/6A	4x35/160A	4x2,5/6A	-	4x2,5/6A
Tension 400V - III + N + T	Nºxmm2/A	5x16/63A	5x2,5/6A	5x25/100A	5x2,5/6A	5x25/125A	5x2,5/6A
Ø Gas inlet	BSP	1/2"		1/2"		1/2"	
Ø Steam inlet	BSP	3/4"		3/4"		3/4"	
Ø Condensed (steam models)	BSP	1/2"		1/2"		1/2"	
<b>DIMENSIONS / PACKING DIMENSIONS</b>							
Net width / Gross width	mm	2.845/3.145	3.445/3.745	4.145/4.445			
Net depth / Gross depth	mm	1.070/1.153	1.070 /1.153	1.070 / 1.153			
Net height / Gross height	mm	1.420/1.672	1.420/1.672	1.420/1.672			
Net weight / Gross weight	Kg	1.189/ 1.231	1.517/1.567	1.765/1.815			
Volume	m3	6,06	7,22	8,57			
<b>OTHERS</b>							
Fume outlet	Nº	2	2	2			
Ø Fume outlet	mm	153	153	153			
Air flow	m3/h	1.200	1.200	1.200			
Noise Level	dB	65	65	65			

\*45 %-25 % moisture

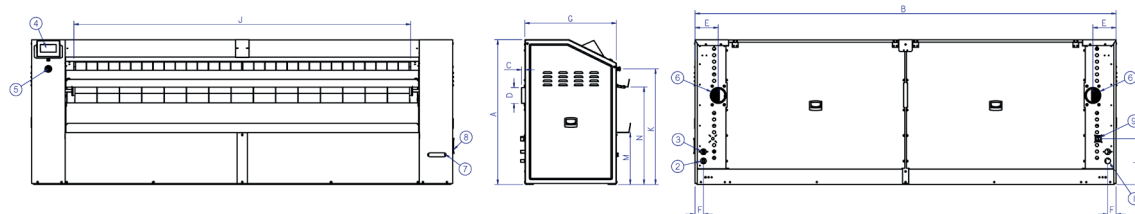

01. Electrical connection
02. Gas or steam connection
03. Steam outlet
04. Control panel
05. Emergency stop
06. Fume exhaust
07. Crank contactor
08. Crank
09. Main switch

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
C-200/65	1.420	2.845	36	Ø152	228	83	897	2.160	1.079	2.004	1.128	447	509	952
C-260/65	1.420	3.445	36	Ø152	228	83	897	2.760	1.079	2.604	1.128	447	509	952
C-330/65	1.420	4.145	36	Ø152	228	83	897	3.460	1.079	3.304	1.128	447	509	952