



Primer

LS-100C / 120C T2

HIGH SPIN WASHER EXTRACTORS



T2 CONTROL

User friendly and totally programmable 7" touch screen
USB Connection. PC software free of charge for programming, telemetry, data analysis...
Videos on display (ads, instructions)
37 languages
8 dosing signals as standard



G FACTOR

High G-FACTOR of 350



CONNECTIVITY

IoT PrimerLINK standard
Remote technical service
Management of laundries: OPL



EFFICIENCY

Intelligent consumption
Optimal KG
Low water consumption
Water recovery tanks ready: SAVETANK



VERSATILITY

Electric < > Hot water
Wet cleaning features



ERGONOMICS

Easy opening/closing system for door lock
Biggest door diameters: Ø700



MAINTENANCE

Equivalent parts for all models: contactors, electronic devices, gear
Technical menu: traceability, error diagnosis



OTHERS

Drum and tub in stainless steel AISI 304
3 water inlets
Soft mounted, free standing washers.
Panels in skinplate
Easy to install, no need of fixation to the floor.
CB and WRAS approved product. Option ETL
Tropicalized model: protected board
High spin washers with suspended drum.




OPTIONS

- Dosing pump kit DQ-2
- Extra dosing pump DB-1
- Double drain
- Double tilt
- Front tilt for
- Weighing system (Not available with tilting kits)
- Relay card with 6 extra dosing signals: up to 14 signals
- Reversible door opening
- Tropicalized model: protected board
- Double heating E + S
- Stainless steel AISI 304 outer casing
- Maritime voltage for electric models: 440V III 50/60 Hz
No neutral

TECHNICAL DATA	UNIT.	LS-100C T2		LS-120C T2		
DRUM						
Load capacity 1:9 / 1:10	Kg	105/95		130/115		
Volume	l	950		1150		
Diameter	mm	1360		1360		
Depth	mm	637		775		
GENERAL DETAILS						
Washing speed / Spining speed	r.p.m.	34/678		34/678		
G Factor	-	350		350		
Maximum force transmitted	KN	37,77 ±5,25		37,77 ±5,25		
Frequency-dynamic force	Hz	11,33		11,33		
Noise level	dB	< 70		< 70		
Coin laundry version	-	No		No		
Double drain	-	Opt		Opt		
Weighing System / Tilting System	-	Opt / Opt		Opt / Opt		
SLUICE option	-	No		No		
DOOR						
Height center door / Height door	mm	1.330 / 900		1.330 / 900		
Diameter	mm	700		700		
POWER						
Motor	kW	15		15		
Electric heating power	kW	-		-		
Total electric power (electric model)	kW	-		-		
Total electric power (hw, steam model)	kW	15		15		
CONNECTIONS			ELECTRIC	STEAM - HOT WATER	ELECTRIC	STEAM - HOT WATER
Tension 230V - I + N + T	Nº x mm2 / A	-	-	-	-	
Tension 230V - III + T	Nº x mm2 / A	-	3x25+T - 63A	-	3x25+T - 63A	
Tension 400V - III + N + T	Nº x mm2 / A	-	4x10+T - 40A	-	4x10+T - 40A	
Steam inlet (Steam model) inch	inch	1-1/4"		1-1/4"		
Maximum steam consumption (Steam model)	Kg/h	26,5		26,5		
Water inlet inch	inch	1-1/2"		1-1/2"		
Water main pressure	Kgs/cm2	2-4		2-4		
Maximum water consumption*	Lit/h	1058*		1254*		
Drain inch	inch	4"		4"		
Drainage capacity	Lit/min	500		500		
DIMENSIONS / PACKING DIMENSIONS						
Net Width / Gross Width	mm	1.836 / 1.900		1.836 / 1.900		
Net Depth / Gross Depth	mm	1.649 / 2.030		1.863 / 2.030		
Net Height / Gross Height	mm	2.245 / 2.290		2.245 / 2.290		
Net weight / Gross weight	kg	3.950 / 4.100		3.950 / 4.100		
Volume	m3	8,83		8,83		

* Program nº2, 100% load

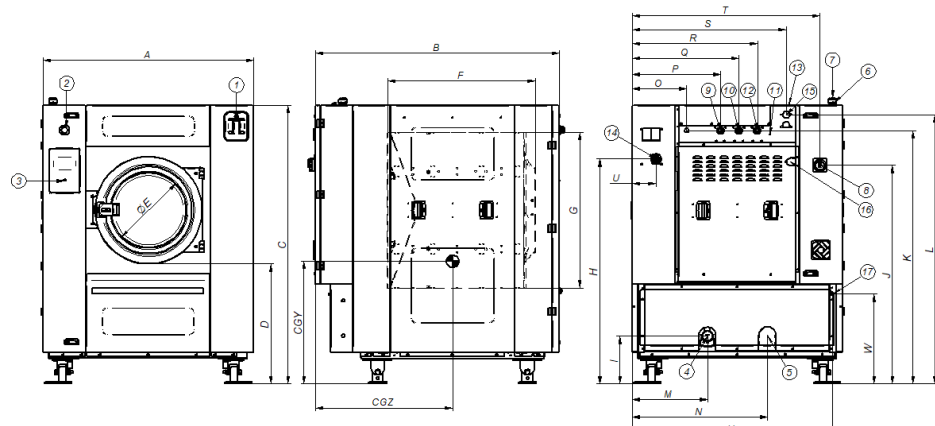

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN 2
5. DRAIN 1
6. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
7. ELECTRICAL CONNECTION
8. MAIN SWITCH
9. AUXILIAR WATER INLET
10. HOT WATER INLET
11. EQUIPOTENTIAL CONNECTION
12. COLD WATER INLET
13. STEAM OUTPUT
14. LIQUID SOAP CONNECTION
15. STEAM CONNECTION
16. AIR INTAKE
17. ETHERNET PORT

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	CGY	CGZ
LS-100C	mm	1.765	1.650	2.245	945	700	792	1.350	1.740	336	1.781	2.038	2.110	675	1.092	494	634	774	954	994	1.239	1.646	165	2.049	853	1.025
LS-120C	mm	1.765	1.832	2.245	945	700	930	1.350	1.740	336	1.781	2.038	2.110	675	1.092	494	634	774	954	994	1.239	1.646	165	2.049	853	1.130

