



Primer

LS-11 / 14 T2

HIGH SPIN WASHER EXTRACTORS



T2 CONTROL

User friendly and totally programmable 7" T2
 USB Connection. Online platform free of charge for
 programming, telemetry, data analysis...thanks to the IoT
 Videos on display (ads, instructions, etc.)
 37 languages
 8 dosing signals as standard



G FACTOR

High G-FACTOR of 500



CONNECTIVITY

IoT PrimerLINK standard
 Remote technical service
 Management of laundries: OPL and COIN
 Remote payment



EFFICIENCY

Intelligent consumption
 Optimal KG
 Water Recovery tanks ready: SAVETANK
 Low water consumption



VERSATILITY

Make to order: customisation
 OPL < > COIN
 Electric < > Hot water
 Drain valve < > Pump
 Wet cleaning features



ERGONOMICS

Biggest door diameters: Ø373
 Easy opening/closing system for door lock



MAINTENANCE

Hinged control panel: easy and ergonomic access
 Technical menu: statistics for technicians and
 maintenance with external console (with console option)



OTHERS

Grey skinplate outer casing. Drum and tub in stainless
 steel AISI 304
 Detergent dispenser with 4 compartments
 Electronic control of imbalance with frequency control
 LOADING AID feature: water and rotation control
 CB and WRAS approved product
 Option ETL
 High spin washers with suspended drum.




OPTIONS

- Dosing pump kit DQ-2
- Extra dosing pump DB-1
- Double drain
- External double drain 3" (recommended for LS-11)
- Drain pump kit
- Normally closed valve
- Recirculation of bath water
- Levelling feet
- Auto Weight: automatic weighing sensor system on feet (Includes kit with extra dosing signals)
- Relay card with 6 extra dosing signals: up to 14 signals
- Silicone gasket for models
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Plinth for mops with drawer inox/skinplate
- Plinth to level all machines from top
- Plinth to align loading height (door base at 850mm)
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Maritime volt elect. models: 440V III 50/60 Hz No neutral
- Coin/token kit
- Auto unlock kit for the door.

TECHNICAL DATA	UNIT.	LS-11 T2	LS-14 T2			
DRUM						
Load capacity 1:9 / 1:10	Kg	11/10	14/13			
Volume	l	100	130			
Diameter	mm	532	620			
Depth	mm	425	430			
GENERAL DETAILS						
Washing speed / Spining speed	r.p.m.	50/1.300	50/1.204			
G Factor	-	500	500			
Maximum force transmitted	KN	2,08 ±0,75	2,49 ±1,05			
Frequency-dynamic force	Hz	16,7	16,7			
Noise level	dB	< 70	< 70			
Coin laundry version	-	Yes	Yes			
Double drain	-	No	Opt			
Weighing System / Tilting System	-	Opt / No	Opt / No			
SLUICE option	-	No	No			
DOOR						
Height center door / Height door	mm	630/370	700 / 440			
Diameter	mm	373	373			
POWER						
Motor	kW	0,75	1,1			
Electric heating power	kW	6	9			
Total electric power (electric model)	kW	6,25	9,4			
Total electric power (hw, steam model)	kW	0,75	1,1			
CONNECTIONS		ELECTRIC	STEAM - HOT WATER	ELECTRIC	STEAM - HOT WATER	
Tension 230V - I + N + T	Nº x mm2 / A	2x6+T - 40A	2x1,5+T - 16A	2x10+T - 50A	2x1,5+T - 16A	
Tension 230V - III + T	Nº x mm2 / A	3x2,5+T - 20A	-	3x2,5+T - 20A	-	
Tension 400V - III + N + T	Nº x mm2 / A	4x1,5+T - 16A	-	4x1,5+T - 16A	-	
Steam inlet (Steam model) inch	inch	1/2"		1/2"		
Maximum steam consumption (Steam model)	Kg/h	7		8,5		
Water inlet inch	inch	3/4"		3/4"		
Water main pressure	Kgs/cm2	2-4		2-4		
Maximum water consumption*	Lit/h	71,4*		88,8*		
Drain inch	inch	3"		3"		
Drainage capacity	Lit/min	200		200		
DIMENSIONS / PACKING DIMENSIONS						
Net Width / Gross Width	mm	692 / 730			788 / 830	
Net Depth / Gross Depth	mm	788 / 1.000			869 / 1.010	
Net Height / Gross Height	mm	1.185 / 1.417			1.307 / 1.560	
Net weight / Gross weight	kg	230 / 239			250 / 283	
Volume	m3	1,03			1,31	

* Program nº20, 75% load

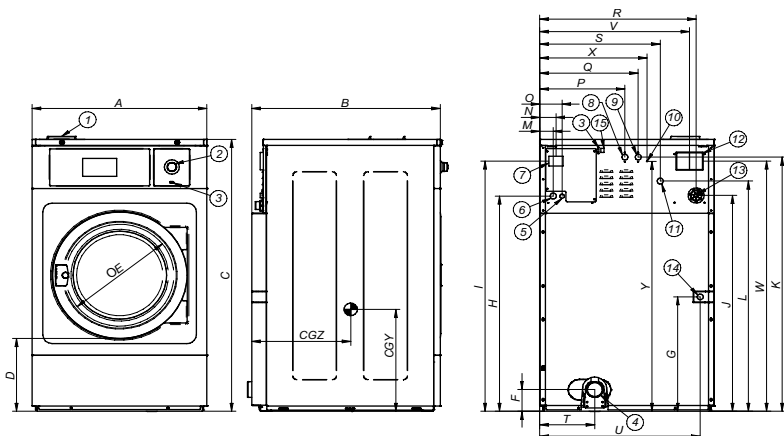

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN
5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. MAIN SWITCH
8. AUXILIAR WATER INLET
9. HOT WATER INLET
10. EQUIPOTENTIAL CONNECTION
11. COLD WATER INLET
12. BLUR OUTPUT / WATER OVERLOAD
13. LIQUID SOAP CONNECTION
14. STEAM CONNECTION
15. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
LS-11	mm	692	788	1.185	370	373	125	354	913	1.085	916	1.100	985	61	74	101	292	352	610	448	226	626	580	1.080	442	1.145	424	577
LS-14	mm	788	869	1.307	440	373	243	385	1.034	1.202	1.037	1.221	1.106	61	74	101	385	445	706	544	243	718	676	1.202	485	1.201	450	651

