



Primer

LS-18 / 22 T2

HIGH SPIN WASHER EXTRACTORS



T2 CONTROL

User friendly and totally programmable 7" USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT Videos on display (ads, instructions, etc.)
37 languages
8 dosing signals as standard



G FACTOR

High G-FACTOR of 500-450



CONNECTIVITY

IoT PrimerLINK standard
Remote technical service
Management of laundries: OPL and COIN
Remote payment



EFFICIENCY

Intelligent consumption
Optimal KG
Water Recovery tanks ready: SAVETANK
Low water consumption



VERSATILITY

Make to order: customisation
OPL < > COIN
Electric < > Hot water
Drain valve < > Pump
Wet cleaning features



ERGONOMICS

Biggest door diameters: Ø460
Easy opening/closing system for door lock



MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics for technicians and maintenance with external console (with console option)



OTHERS

Grey skinplate outer casing. Drum and tub in stainless steel AISI 304
Detergent dispenser with 4 compartments
Electronic control of imbalance with frequency control
LOADING AID feature: water and rotation control
CB and WRAS approved product
Option ETL
High spin washers with suspended drum.



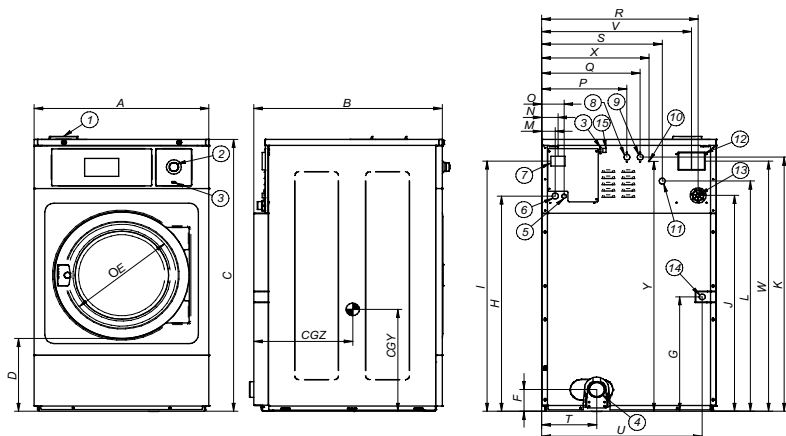

**FACTOR
500**

OPTIONS

- Dosing pump kit DQ-2
- Extra dosing pump DB-1
- Double drain
- Normally closed valve
- Recirculation of bath water
- Levelling feet
- Auto Weight: automatic weighing sensor system on feet (Includes kit with extra dosing signals)
- Relay card with 6 extra dosing signals: up to 14 signals
- Silicone gasket for models
- Reversible door opening
- Tropicalized model: protected board
- Kit to transform an E or HW into steam version
- Plinth for mops with drawer inox/skinplate
- Plinth to level all machines from top
- Plinth to align loading height (door base at 850mm)
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin/token kit
- Auto unlock kit for the door.

TECHNICAL DATA	UNIT.	LS-18 T2	LS-22 T2		
DRUM					
Load capacity 1:9 / 1:10	Kg	20/18	25/22		
Volume	l	180	220		
Diameter	mm	700	700		
Depth	mm	470	560		
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	47/1.133	47/1.071		
G Factor	-	500	450		
Maximum force transmitted	KN	3,41 ±1,4	4,12 ±1,4		
Frequency-dynamic force	Hz	16	16		
Noise level	dB	< 70	< 70		
Coin laundry version	-	Yes	Yes		
Double drain	-	Opt	Opt		
Weighing System / Tilting System	-	Opt / No	Opt / No		
SLUICE option	-	No	No		
DOOR					
Height center door / Height door	mm	765 / 450	765 / 450		
Diameter	mm	460	460		
POWER					
Motor	kW	2,2	2,2		
Electric heating power	kW	12	12		
Total electric power (electric model)	kW	12,75	12,75		
Total electric power (hw, steam model)	kW	2,2	2,2		
CONNECTIONS					
		ELECTRIC	STEAM - HOT WATER	ELECTRIC	STEAM - HOT WATER
Tension 230V - I + N + T	Nº x mm2 / A	2x16+T - 63A	2x4+T - 32A	2x16+T - 63A	2x4+T - 32A
Tension 230V - III + T	Nº x mm2 / A	3X6+T - 40A	-	3X6+T - 40A	-
Tension 400V - III + N + T	Nº x mm2 / A	4x4+T - 32A	-	4x4+T - 32A	-
Steam inlet (Steam model) inch	inch	1/2"		1/2"	
Maximum steam consumption (Steam model)	Kg/h	12		12	
Water inlet inch	inch	3/4"		3/4"	
Water main pressure	Kgs/cm2	2-4		2-4	
Maximum water consumption*	Lit/h	118,3*		118,3*	
Drain inch	inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	884 / 945		884 / 945	
Net Depth / Gross Depth	mm	913 / 1.030		1003/1.140	
Net Height / Gross Height	mm	1.415 / 1.700		1.415 / 1.700	
Net weight / Gross weight	kg	360 / 393		380/413	
Volume	m3	1,63		1,83	

* Program nº20, 75% load



1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN
5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. MAIN SWITCH
8. AUXILIAR WATER INLET
9. HOT WATER INLET
10. EQUIPOTENTIAL CONNECTION
11. COLD WATER INLET
12. BLUR OUTPUT / WATER OVERLOAD
13. LIQUID SOAP CONNECTION
14. STEAM CONNECTION
15. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
LS-18	mm	884	913	1.415	450	460	95	380	1.135	1.303	1.138	1.322	1.207	61	74	101	429	509	802	640	348	814	772	1.303	569	1.297	464	702
LS-22	mm	884	1.003	1.415	450	460	95	380	1.135	1.303	1.138	1.322	1.207	61	74	101	429	509	802	640	348	814	772	1.303	569	1.297	464	747

