



Primer

LS-60C / 80C T2

HIGH SPIN WASHER EXTRACTORS

T2 CONTROL

User friendly and totally programmable 7" USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT. Videos on display (ads, instructions, etc.) 37 languages. 8 dosing signals as standard

G FACTOR

High G-FACTOR of 450

CONNECTIVITY

IoT PrimerLINK standard
Remote technical service
Management of laundries: OPL

EFFICIENCY

Intelligent consumption
Optimal KG
Low water consumption

VERSATILITY

Electric < > Hot water
Wet cleaning features

ERGONOMICS

Easy opening/closing system for door lock
Biggest door diameters: Ø560

MAINTENANCE

Hinged control panel: easy and ergonomic access.
Equivalent parts for all models: contactors, electronic devices, gear
Technical menu: telemetry, error diagnosis.
Isolated from humidity

OTHERS

Drum and tub in stainless steel AISI 304
3 water inlets (Water inlet hoses not included)
Soft mounted, free standing washers.
Panels in skinplate
Easy to install, no need of fixation to the floor.
CB and WRAS approved product. Option ETL
Tropicalized model: protected board
High spin washers with suspended drum.




OPTIONS

- Dosing pump kit DQ-2
- Extra dosing pump DB-1
- Double drain
- Normally closed valve
- Double tilt
- Front tilt
- Water inlet hose for (one per water intake)
- Weighing system
- Relay card with 6 extra dosing signals: up to 14 signals. (Not available with tilting kits)
- Reversible door opening
- Tropicalized model: protected board
- Kit to transform an E or HW to steam
- Double heating E + S
- Stainless steel AISI 304 outer casing
- Maritime voltage for electric models: 440V III 50/60 Hz
No neutral

TECHNICAL DATA	UNIT.	LS-60C T2		LS-80C T2	
DRUM					
Load capacity 1:9 / 1:10	Kg	65/59		85/77	
Volume	l	590		770	
Diameter	mm	1048		1048	
Depth	mm	680		892	
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	38/875		38/875	
G Factor	-	450		450	
Maximum force transmitted	KN	18 ±4,2		23 ±4,8	
Frequency-dynamic force	Hz	12,66		12,66	
Noise level	dB	< 70		< 70	
Coin laundry version	-	No		No	
Double drain	-	Opt		Opt	
Weighing System / Tilting System	-	Opt / Opt		Opt / Opt	
SLUICE option	-	No		No	
DOOR					
Height center door / Height door	mm	1170/810		1170/810	
Diameter	mm	560		560	
POWER					
Motor	kW	15		15	
Electric heating power	kW	36		48/36	
Total electric power (electric model)	kW	39		51/39	
Total electric power (hw, steam model)	kW	15		15	
CONNECTIONS		ELECTRIC		STEAM - HOT WATER	
Tension 230V - I + N + T	Nº x mm2 / A	-		-	
Tension 230V - III + T	Nº x mm2 / A	3x25+T - 100A		3x10+T - 50A	
Tension 400V - III + N + T	Nº x mm2 / A	4x16+T - 63A		4x25+T - 80A	
Steam inlet (Steam model) inch	inch	3/4"		3/4"	
Maximum steam consumption (Steam model)	Kg/h	21		25	
Water inlet inch	inch	1"		1"	
Water main pressure	Kgs/cm2	2-4		2-4	
Maximum water consumption*	Lit/h	598*		781*	
Drain inch	inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	1420 / 1600		1420 / 1600	
Net Depth / Gross Depth	mm	1433 / 1595		1645 / 1805	
Net Height / Gross Height	mm	1880 / 1930		1880 / 1930	
Net weight / Gross weight	kg	1650 / 1800		1800 / 2000	
Volume	m3	4,9		5,6	

* Program nº2, 100% load

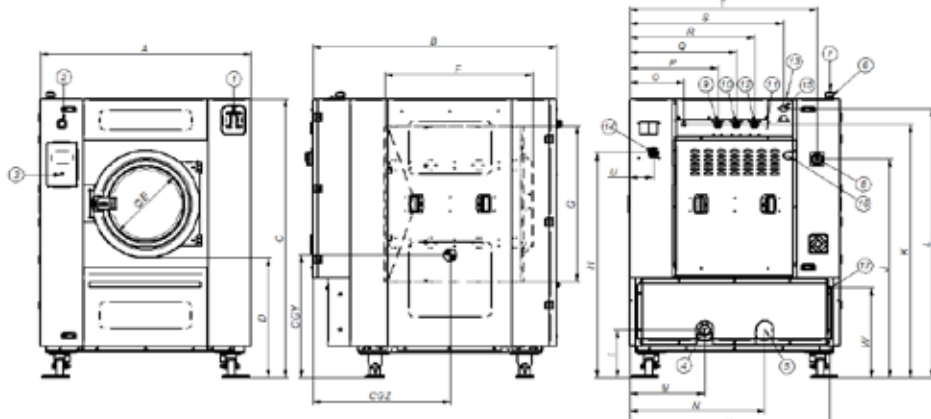

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN 2
5. DRAIN 1
6. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
7. ELECTRICAL CONNECTION
8. MAIN SWITCH
9. AUXILIAR WATER INLET
10. HOT WATER INLET
11. EQUIPOTENTIAL CONNECTION
12. COLD WATER INLET
13. STEAM OUTPUT
14. LIQUID SOAP CONNECTION
15. STEAM CONNECTION
16. AIR INTAKE
17. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	CGY	CGZ	
LS-60C	mm	1.420	1.433	1.880	810	560	760	1.050	1.563	323	1.475	1.710	1.817	508	912	367	595	720	845	1.040	1.267	160	1.353	608	830	820
LS-80C	mm	1.420	1.645	1.880	810	560	972	1.050	1.563	323	1.475	1.710	1.817	508	912	367	595	720	845	1.040	1.267	160	1.353	608	830	925

