



# Primer

## RS-18/22 T2

### LOW SPIN WASHER EXTRACTORS



#### T2 CONTROL

User friendly and totally programmable 7" USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT. Videos on display (ads, instructions, etc.) 37 languages. 8 dosing signals as standard. 8 dosing signals as standard



#### G FACTOR

High G-FACTOR of 200



#### CONNECTIVITY

IoT PrimerLINK standard  
Remote technical service  
Management of laundries: OPL  
Remote payment



#### EFFICIENCY

Intelligent consumption  
Optimal KG  
Low water consumption



#### VERSATILITY

Make to order: customisation  
OPL < > COIN  
Electric < > Hot water  
Wet cleaning features



#### ERGONOMICS

Easy opening/closing system for door lock  
Biggest door diameters: Ø460



#### MAINTENANCE

Hinged control panel: easy and ergonomic access.  
Equivalent parts for all models: contactors, electronic devices,...  
Technical menu: telemetry, error diagnosis.



#### OTHERS

Hard mounted washers.  
Anchoring to floor with anchoring base.  
Panels in skinplate.  
Drum and tub in stainless steel AISI 304  
3 water inlets.  
CB and WRAS approved product. Option ETL




#### OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- SLUICE: model with 8mm drum holes
- Anchoring base
- Double drain
- Normally closed valve
- Water Recycle Kit: recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Maritime voltage for electric models: 440V III 50/60 Hz  
No neutral
- Coin / token kit
- Auto unlock kit for the door

TECHNICAL DATA	UNIT.	RS-18 T2	RS-22 T2		
<b>DRUM</b>					
Load capacity 1:9 / 1:10	Kg	20/18	25/22		
Volume	l	180	220		
Diameter	mm	700	700		
Depth	mm	470	570		
<b>GENERAL DETAILS</b>					
Washing speed / Spining speed	r.p.m.	50/714	50/714		
G Factor	-	200	200		
Maximum force transmitted	KN	2,63 ±5	3,04 ±5		
Frequency-dynamic force	Hz	8,42	8,42		
Noise level	dB	< 70	< 70		
Coin laundry version	-	Yes	Yes		
Double drain	-	Opt.	Opt.		
Weighing System / Tilting System	-	No / No	No / No		
SLUICE option	-	Yes	Yes		
<b>DOOR</b>					
Height center door / Height door	mm	655 / 348	655 / 348		
Diameter	mm	460	460		
<b>POWER</b>					
Motor	kW	2,2	2,2		
Electric heating power	kW	12	12		
Total electric power (electric model)	kW	12,75	12,75		
Total electric power (hw, steam model)	kW	2,2	2,2		
<b>CONNECTIONS</b>		<b>ELECTRIC</b>	<b>STEAM - HOT WATER</b>	<b>ELECTRIC</b>	<b>STEAM - HOT WATER</b>
Tension 230V - I + N + T	Nº x mm2 / A	2x16+T - 63A	2x4+T - 32A	2x16+T - 63A	2x4+T - 32A
Tension 230V - III + T	Nº x mm2 / A	3X6+T - 40A	-	3X6+T - 40A	-
Tension 400V - III + N + T	Nº x mm2 / A	4x4+T - 32A	-	4x4+T - 32A	-
Steam inlet (Steam model) inch	inch	1/2"		1/2"	
Maximum steam consumption (Steam model)	Kg/h	12		12	
Water inlet inch	inch	3/4"		3/4"	
Water main pressure	Kgs/cm2	2-4		2-4	
Maximum water consumption*	Lit/h	120*		120*	
Drain inch	inch	3"		3"	
Drainage capacity	Lit/min	200		200	
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net Width / Gross Width	mm	788 / 880		788 / 880	
Net Depth / Gross Depth	mm	840 / 1.040		950/1140	
Net Height / Gross Height	mm	1.307 / 1.500		1.307 / 1.500	
Net weight / Gross weight	kg	281 / 301		300/320	
Volume	m3	1,3		1,5	

\* Program nº20, 75% load

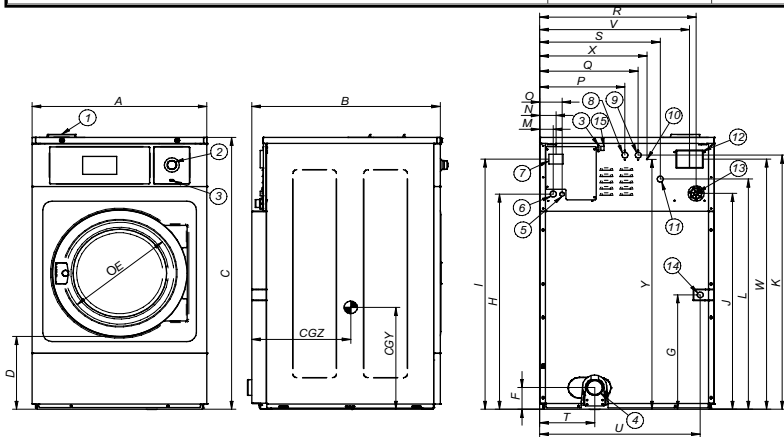

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN
5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. MAIN SWITCH
8. AUXILIAR WATER INLET
9. HOT WATER INLET
10. EQUIPOTENTIAL CONNECTION
11. COLD WATER INLET
12. BLUR OUTPUT / WATER OVERLOAD
13. LIQUID SOAP CONNECTION
14. STEAM CONNECTION
15. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
RS-18	mm	788	850	1.307	348	460	115	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	249	724	676	1.202	485	1.202	479	546
RS-22	mm	788	950	1.307	348	460	115	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	249	724	676	1.202	485	1.202	479	586

