



Primer

RS-35C/45C T2

LOW SPIN WASHER EXTRACTORS



T2 CONTROL

User friendly and totally programmable 7" USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT. Videos on display (ads, instructions, etc.) 37 languages. 8 dosing signals as standard. 8 dosing signals as standard



G FACTOR

High G-FACTOR of 200



CONNECTIVITY

IoT PrimerLINK standard
Remote technical service
Management of laundries: OPL
Remote payment



EFFICIENCY

Intelligent consumption
Optimal KG
Low water consumption



VERSATILITY

Make to order: customisation
OPL < > COIN
Electric < > Hot water
Wet cleaning features



ERGONOMICS

Easy opening/closing system for door lock
Biggest door diameters: Ø560



MAINTENANCE

Hinged control panel: easy and ergonomic access.
Equivalent parts for all models: contactors, electronic devices,...
Technical menu: telemetry, error diagnosis.



OTHERS

Hard mounted washers.
Anchoring to floor with anchoring base.
Panels in skinplate.
Drum and tub in stainless steel AISI 304
3 water inlets.
CB and WRAS approved product. Option ETL




OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- SLUICE: model with 8mm drum holes
- Anchoring base
- Double drain
- Normally closed valve
- Water Recycle Kit: recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin / token kit
- Auto unlock kit for the door

TECHNICAL DATA	UNIT.	RS-35C T2	RS-45C T2		
DRUM					
Load capacity 1:9 / 1:10	Kg	39/35	49/45		
Volume	l	350	450		
Diameter	mm	860	860		
Depth	mm	602	720		
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	45/644	45/644		
G Factor	-	200	200		
Maximum force transmitted	KN	4,59 ±8	5,9 ±8		
Frequency-dynamic force	Hz	7,58	7,58		
Noise level	dB	< 70	< 70		
Coin laundry version	-	Yes	Yes		
Double drain	-	Opt.	Opt.		
Weighing System / Tilting System	-	No / No	No / No		
SLUICE option	-	Yes	Yes		
DOOR					
Height center door / Height door	mm	735 / 440	735 / 440		
Diameter	mm	560	560		
POWER					
Motor	kW	4	6		
Electric heating power	kW	21	21		
Total electric power (electric model)	kW	22	22		
Total electric power (hw, steam model)	kW	4	4		
CONNECTIONS		ELECTRIC	STEAM - HOT WATER	ELECTRIC	STEAM - HOT WATER
Tension 230V - I + N + T	Nº x mm2 / A	-	2x4+T - 32A	-	2x4+T - 32A
Tension 230V - III + T	Nº x mm2 / A	3x16+T - 63A	-	3x16+T - 63A	-
Tension 400V - III + N + T	Nº x mm2 / A	4x6+T - 40A	-	4x6+T - 40A	-
Steam inlet (Steam model) inch	inch	3/4"		3/4"	
Maximum steam consumption (Steam model)	Kg/h	18		21	
Water inlet inch	inch	3/4"		3/4"	
Water main pressure	Kgs/cm2	2-4		2-4	
Maximum water consumption*	Lit/h	199,6*		256,6*	
Drain inch	inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	979/ 1.050		979/ 1.050	
Net Depth / Gross Depth	mm	1.066 / 1.250		1.255 / 1.440	
Net Height / Gross Height	mm	1.411 / 1.600		1.411 / 1.640	
Net weight / Gross weight	kg	473 / 503		600 / 670	
Volume	m3	2,1		2,5	

* Program nº20, 75% load

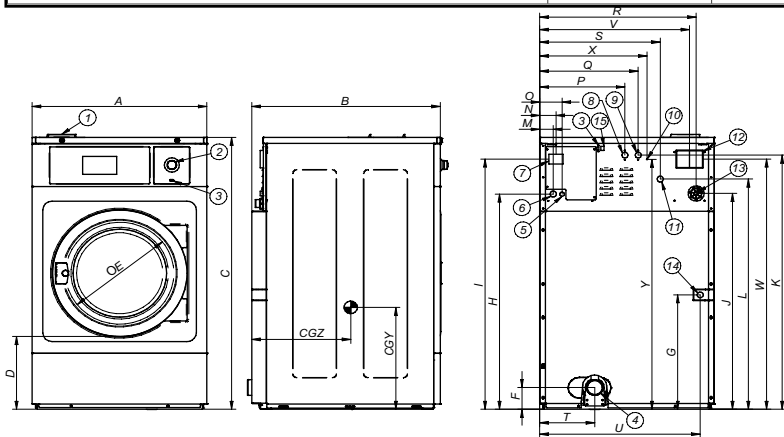

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN
5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. MAIN SWITCH
8. AUXILIAR WATER INLET
9. HOT WATER INLET
10. EQUIPOTENTIAL CONNECTION
11. COLD WATER INLET
12. BLUR OUTPUT / WATER OVERLOAD
13. LIQUID SOAP CONNECTION
14. STEAM CONNECTION
15. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
RS-35C	mm	979	1.065	1.411	370	560	147	623	1.139	1.307	1.116	1.322	1.211	61	74	101	545	625	885	715	262	917	855	1.281	760	1.373	635	682
RS-45C	mm	979	1.185	1.411	370	560	147	623	1.139	1.307	1.116	1.322	1.211	61	74	101	545	625	885	715	262	917	855	1.281	760	1.373	635	760

