



Primer

C-140/20 P, C-160/20 P, C-200/20 P FLATWORK DRYER IRONER Ø200



ELECTRONIC CONTROL

Simple and user friendly with an auto mode: automatic management of the ironing speed according to the selected temperature.

Digital speed and temperature display



EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure

Automatic shutdown at 80°C

Fumes circulation circuit from the bottom reducing energy consumption



ROBUSTNESS

Roll driving by speed inverter Nomex quality feeding and ironing belts: high temperatures resistant

Panels in skinplate and stainless steel.

Coiled felt for greater lifespan



ERGONOMICS

Acoustic comfort : <60 dB

Appropriate operating height: 990 mm feeding belts

Minimal encumbrance: space saving, suitable for most spaces

Electronic control with Auto mode: easy to use, optimized ironing speed



MAINTENANCE

Easy access to all components on both sides of the machine

Basic connections : electrical connection and air extraction



OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation

Front feeding and return

Built-in cool down system

Polished steel roll ø 200 mm

Roll length: 1400, 1600 and 2000 mm


Electric heating

CE standard

OPTIONS


Marine tension 440V III 60 Hz without N

Tension 230V III 50-60 Hz

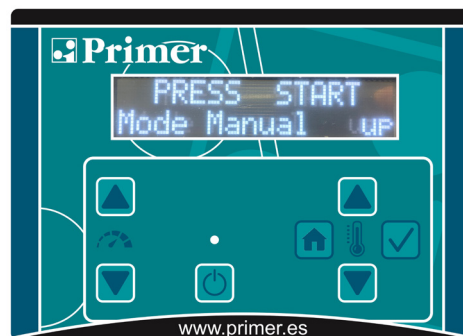

TECHNICAL DATA	UNIT.	C-140/20 P	C-160/20 P	C-200/20 P			
GENERAL DATA							
Theoretical production*	Kg/h	10-12	13-15	19-21			
Radiant gas theorial production*	Kg/h	-	-	-			
Evaporation power	Kg/h	8-10	10-12	10-12			
Ø Roll	mm	200	200	200			
Working length	mm	1.400	1.600	2.000			
Feeding bands height	mm	990	990	990			
Ironing speed	mt/min	1,5 - 6	1,5 - 6	1,5 - 6			
Electronic control		Yes	Yes	Yes			
No of programs	Nº	2	2	2			
Rear exit + length folder		-	-	-			
POWER							
Electric heating	kW	10,5	12	18			
Total electric power (elec. mod.)	kW	10,84	12,34	18,37			
Gas heating	kW	-	-	-			
Total electric power (gas mod.)	kW	-	-	-			
Steam heating	kW	-	-	-			
Total electric power (steam mod.)	kW	-	-	-			
Roll motor	kW	0,28	0,28	0,28			
Fan motor	kW	0,09	0,09	0,09			
Folder add. elec. power	kW	-	-	-			
Folder+rear exit add. elec. power	kW	-	-	-			
CONNECTIONS							
		ELECT / GAS		ELECT / GAS		ELECT / GAS	
Tension 230V - III + T	Nº x mm²/A	4 x 6 / 32A	-	4X10/40A	-	4X10/50A	-
Tension 400V - III + N + T	Nº x mm²/A	5 x 4 / 20A	-	4X10/20A	-	4X10/32A	-
Ø Gas inlet		-	-	-	-	-	-
Ø Steam inlet		-	-	-	-	-	-
Ø condensed (steam model)		-	-	-	-	-	-
OVERALL DIMENSIONS / PACKING DIMENSIONS							
Net / gross width	mm	1.878 / 2.130	2.128 / 2.340	2.478 / 2.780			
Net / gross depth**	mm	444**-666 / 770	444**-666 / 770	444**-666 / 770			
Net / gross height	mm	1.110 / 1.400	1.110 / 1.400	1.110 / 1.400			
Net / gross weight	Kg	180 / 220	203 / 240	237 / 275			
Volume	m³	0,93 / 2,30	1,05 / 2,52	1,22 / 3,00			
OTHERS							
No fume outlet	Nº	1	1	1			
Ø Extraction	mm	83	83	83			
Airflow	m3/h	300	300	300			
Sound level	dB	55	55	55			

*45 % moisture
** Rear fan disassembly

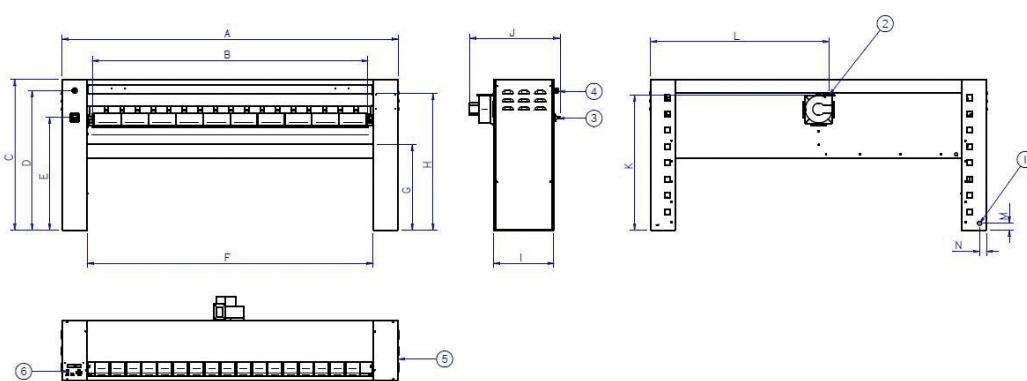

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
	1.878	1.470	1.110	1.028	830	1.510	631	1.006	444	666	995	1.016	50	50
	2.128	1.720	1.110	1.028	830	1.760	631	1.006	444	666	995	1.141	50	50
	2.478	2.070	1.110	1.028	830	2.110	631	1.006	444	666	995	1.316	50	50

