



Primer

C-200/65, C-260/65, C-330/65 FLATWORK DRYER IRONERS Ø650



CONTROL T2

7" touch screen fully programmable
37 available languages, 5 preset programs
USB connection. Free software online for programming, telemetry, data analysis.

IoT - PRIMERLINK standard

Reversing roll as standard



EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure
Automatic shutdown at 80°C (adjustable parameter)
Fumes circulation circuit from the bottom reducing energy consumption

Model with gas radiant burners: +25% productive

SMART IRON: automatic regulation of ironing speed according to residual moisture as option

High production system, ironing speed up to 15 m/min as option



ROBUSTNESS

Roll driving by speed inverter

Nomex quality ironing belts: high temperatures resistant

Panels in skinplate and stainless steel.

Nickel plate roll as option: anticorrosive, more durable



ERGONOMICS

Acoustic comfort : <65 dB

Appropriate operating height: 1120 mm feeding belts

Compact dimensions



MAINTENANCE

Easy access to all components on both sides of the machine

Complete technical menu: statistics, autotest, data recovery for technician and maintenance

Remote communication: faster intervention



OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation

Front feeding and return

Built-in cool down system

Polished steel roll Ø 650 mm

Roll length: 2000, 2600 and 3300 mm

Electric, radiant gas or steam heating

CE standard




OPTIONS

- Nickel plate roll
- Built-in lengthwise folder
- Rear exit (only with folder)
- Cross folder + stacker (only with folder)
- Antistatic belts (+ bar with folder)
- Marine tension 440V III 60Hz without N (electric models)
- Tension 230V III 50-60 Hz

TECHNICAL DATA	UNIT.	C-200/65		C-260/65		C-330/65	
GENERAL DATA							
Theorical production*	Kg/h	90		115		160	
Atmo. gas theorical production*	Kg/h	-		-		-	
Radiant gas theorical production*	Kg/h	104		132		184	
Evaporation power	l/h	40-46		51-60		72-82	
Ø Roll	mm	650		650		650	
Working length	mm	2.000		2.600		3.300	
Feeding bands height	mm	1.120		1.120		1.120	
Ironing speed	mt/min	0,5-15		0,5-15		0,5-15	
Electronic control		Yes		Yes		Yes	
No of programs	Nº	5		5		5	
Rear exit + length folder		OPT		OPT		OPT	
POWER							
Electric heating	kW	42		54		72	
Total electric power (elec. mod.)	kW	43,05		55,05		73,05	
Gas heating	kW	52		69		78	
Total electric power (gas mod.)	kW	1,05		1,05		1,05	
Steam heating	kW	60		76		97	
Total electric power (steam mod.)	kW	1,05		1,05		1,05	
Roll motor	kW	0,55		0,55		0,55	
Fan motor	kW	0,25x2		0,25x2		0,25x2	
Folder add. elec. power	kW	0,56		0,56		0,56	
Folder+rear exit add. elec. power	kW	0,74		0,74		0,74	
CONNECTIONS							
		ELECT / GAS		ELECT / GAS		ELECT / GAS	
Tension 230V - III + T	Nº x mm²/A	4x25 / 125A	4x2,5 / 6A	4x35 / 160A	4x2,5 / 6A	-	4x2,5 / 6A
Tension 400V - III + N + T	Nº x mm²/A	5x16 / 63A	5x2,5 / 6A	5x25 / 100A	5x2,5 / 6A	5x25 / 125A	5x2,5 / 6A
Ø Gas inlet		1"		1"		1"	
Ø Steam inlet		3/4"		3/4"		3/4"	
Ø condensed (steam model)		1/2"		1/2"		1/2"	
OVERALL DIMENSIONS / PACKING DIMENSIONS							
Net / gross width	mm	2.845 / 3.145		3.445 / 3.745		4.145 / 4.445	
Net / gross depth	mm	1.070 / 1.153		1.070 / 1.153		1.070 / 1.153	
Net / gross height	mm	1.420 / 1.672		1.420 / 1.672		1.420 / 1.672	
Net / gross weight	Kg	1.189 / 1.231		1.517 / 1.567		1.765 / 1.815	
Volume	m³	4,32 / 6,06		5,23 / 7,22		6,30 / 8,57	
OTHERS							
No fume outlet	Nº	2		2		2	
Ø Extraction	mm	153		153		153	
Airflow	m3/h	1200		1200		1200	
Sound level	dB	65		65		65	

*45 % moisture

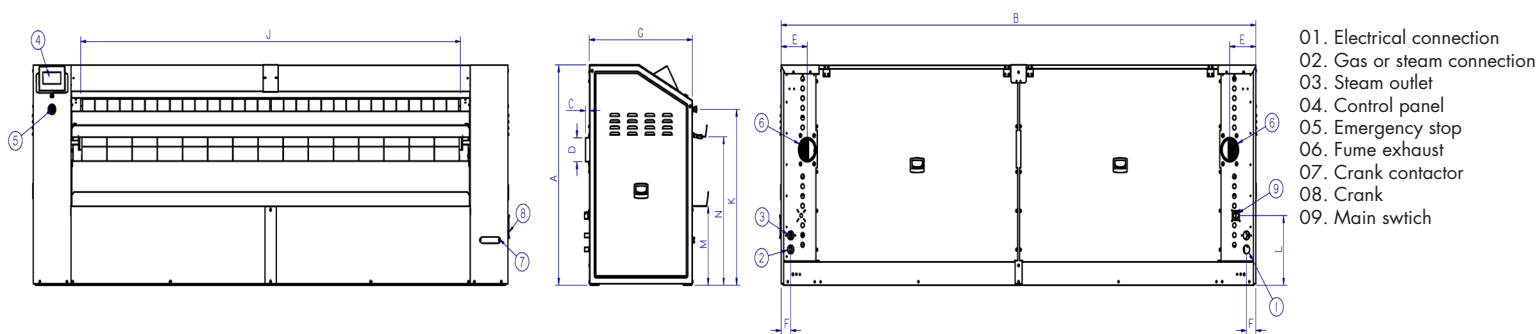

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
C-200/65	1.420	2.845	36	Ø152	228	83	897	2.160	1.079	2.004	1.128	447	509	952
C-260/65	1.420	3.445	36	Ø152	228	83	897	2.760	1.079	2.604	1.128	447	509	952
C-330/65	1.420	4.145	36	Ø152	228	83	897	3.460	1.079	3.304	1.128	447	509	952

