



# Primer

## LCA-70 T2 BARRIER WASHER EXTRACTOR



### CONTROL T2

User friendly and programmable Control T2 with a 7" touch screen

Double display

USB Connection. PC software free of charge for programming, telemetry, data analysis...

37 available languages

8 dosing signals as standard



### OUTSTANDING FEATURES

Automatic positioning of drum with motor brake

3 water inlets

Wet cleaning, telemetry standard

G-FACTOR 375

Heating: electric, steam, and dual heating model (electric+steam)



### EFFICIENCY

Intelligent consumption

Optimal loading

Water Recovery tanks ready: SAVETANK

Low water consumption

High G-FACTOR: reduced residual moisture > reduced drying time



### CONNECTIVITY

IoT - PRIMERLINK standard

Remote technical service

Laundry management



### ERGONOMICS

Huge door opening making loading/unloading easier

Easy friendly drum opening by push button

Loading height: door base 800 mm



### MAINTENANCE

Electric components on the left side, mechanical components on the right side and connections on the top (protected from water and detergents)

Central drain as standard

Technical menu: statistics, alarms, autotest, data recovery for technicians and maintenance



### OTHERS

2 opposed doors. Pass-through barrier washer.

Ready to be connected to dosing pumps

Grey skinplate outer casing

Drum and vat in stainless steel AISI 304

Frequency inverter to control imbalance

CE approved product




### OPTIONS

- 1-door opening (single side operation)
- Automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals)
- Relay card with 6 extra dosing signals: up to 14 signals
- Printer
- Third water inlet
- Double drain
- Titration valve
- Side drain valve
- Low steam pressure (0,5 bar)
- Detergent box with 4 compartments
- UPS device (in case of power failure)
- End of cycle light alarm
- Plinth to align loading height (door base at 850mm)
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 sanitary frame
- Other voltages

TECHNICAL DATA	UNIT.	LCA-70 T2
<b>DRUM</b>		
Capacity 1:9 / 1:10	Kg	78 / 70
Volume	l	694
Diameter	mm	800
Depth	mm	1.380
No of drum compartment	No	2
Pullman partition of drum		N/A
<b>GENERAL DETAILS</b>		
Washing / spin speed	r.p.m.	45 / 920
G Factor	-	375
Dynamic force	KN	5,24
Dynamic force frequency	Hz	15,4
Sound level	dB	<70
Double drain	-	OPT
Weighing system	-	OPT
<b>DRUM</b>		
Height door bottom	mm	800
Drum opening dimensions	mm	640 x 515 (x2)
Vat opening dimensions	mm	1.402 x 650 (x2)
<b>POWER</b>		
Motor	kW	7,5
Electric heating	kW	45
Total electric power (elec mod)	kW	52,5
Total electric power (steam mod)	kW	7,5
<b>CONNECTIONS</b>		<b>ELECTRIC DUAL</b> <b>STEAM</b>
Tension 230V - I + N + T	Nº x mm2 / A	-      -
Tension 230V - III + T	Nº x mm2 / A	4 x 35 / 160A      4 x 2,5 / 16A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 16 / 80A      5 x 2,5 / 10A
steam inlet (steam mod)	Inch	3/4"
Max. steam consumption (steam models)	Kg/h	34,2
Water inlet	Inch	1"
Water pressure	Kgs/cm <sup>2</sup>	3-5
Max. water consumption*	Lit/h	720
Drain	Inch	3"
Drain flow	Lit/min	160
<b>OVERALL DIMENSIONS / PACKING DIMENSIONS</b>		
Net width / Gross width	mm	2.124 / 2.310
Net depth / Gross depth	mm	1.195 / 1.300
Net height / Gross height	mm	1.615 / 1.720
Net weight / Gross weight	kg	1.190 / 1.220
Volume	m3	4,10 / 5,17

\* N°2 Program, 100% load

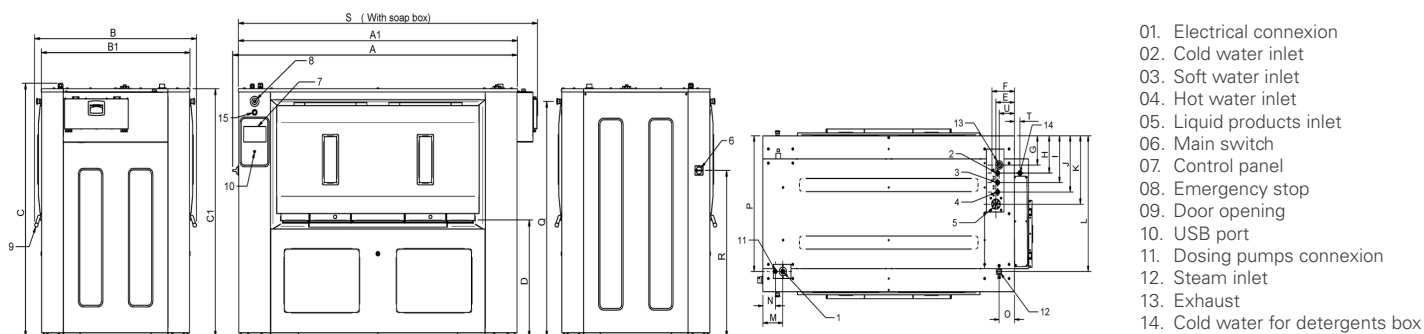

	A	B	C	A1	B1	C1	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
LCA-70	2104	1196	1612	2061	1098	1581	745	152	138	206	263	330	397	482	956	163	103	126	956	1499	1059	2210	45	125

