



### FEATURES

- S models are ironers that dry and irons only, without any folding devices
- 
- Roll dimensions: working width 2m60 and 3m30, diameter 600 mm.
- Frequency inverter.
- Feeding and ironing by Nomex quality belts.
- Panels in white painted steel.
- Polished steel roll, with finger guard.
- Touch screen control: programs can be created with speed control between 3 and 18 m/min and temperature.
- Electric, gas or steam heating.
- Powerful exhaust System.
- Compressed air connexion required: pressure 6,5 bar


### OPTIONS

- 1 lane automatic clamp feeder with vacuum table
- Vacuum table
- Rear exit with by-pass, standard height 850mm
- Motorized rear exit, height 870 mm
- Small pieces 2 lanes back collector
- Small pieces 4 lanes back collector
- Different voltage from 400V III + N 50Hz
- Maritime packing





TECHNICAL DATA	UNIT	S600-2600	S600-3300
<b>GENERAL DATA</b>			
Theoretical production humidity*	Kg	75-105*	110-140*
Ø Roll	mm	600	600
Working width	mm	2.600	3.300
Height floor-feeding	mm	1.050	1.050
Working speed	mt/min	3-10	3-10
Control type	-	Digital	Digital
N° of programs	N°	20	20
<b>POWER</b>			
Electric heating	kW	54	54
Max. electric power electric heating	kW	55,9	55,9
Gas heating (natural / LPG)	kW	63,30 / 67,40	80,30 / 86,30
Max. electric power gas heating	kW	1,9	1,9
Steam heating	kW	55	75
Max. electric power steam heating	kW	1,9	1,9
<b>CONNECTIONS</b>			
Ø Gas inlet	BSP	1"	1"
Ø Steam inlet (12 bar max.)	BSP	1"	1"
Ø Condensed (steam models)	BSP	1/2"	1/2"
Ø Air inlet	mm	12	12
<b>DIMENSIONS / PACKAGING DIMENSIONS</b>			
Net width / gross width	mm	3.670 / 3.830	4.370 / 4.530
Net depth / gross depth	mm	1.440 / 1.620	1.440 / 1.620
Net height / gross height	mm	2.030 / 1.960	2.030 / 1.960
Net weight / gross weight	Kg	1.800 / 2.050	2.050 / 2.350
Volume	m <sup>3</sup>	10,73 / 12,16	12,77 / 14,38
<b>OTHERS</b>			
No. Fume outlet	N°	2	2
Ø Fume outlet	mm	120	120
Extraction rate	m <sup>3</sup> /h	2 x 1.000	2 x 1.000
Compressed air consumption (6,5 bar)	NI/h	5.000	5.000
Sound Level	dB	70	70

\*50% residual moisture, 140gr / m2 of cotton,100% roll utilization

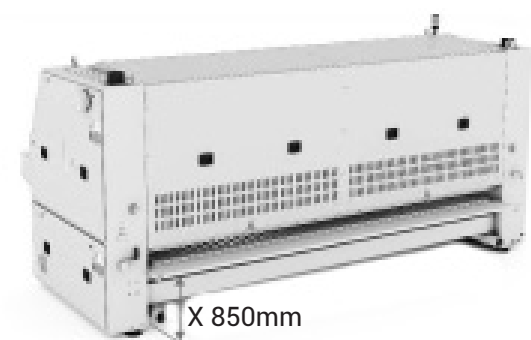

X 850mm

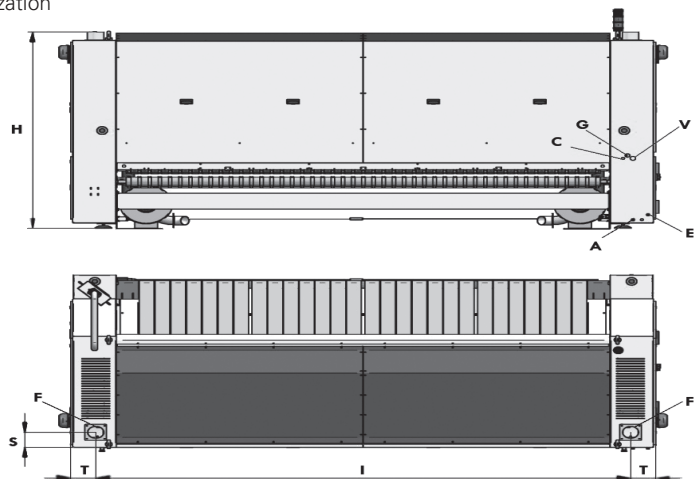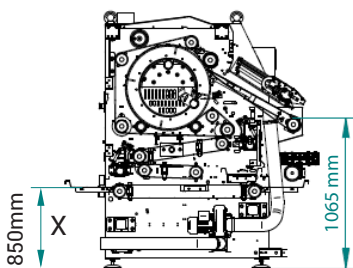

- A. Compressed air inlet
- C. Condensed discharge (steam models)
- E. Electric connection
- F. Fumes extraction
- G. Gas inlet
- V. Steam inlet

	H	I	T	S	A	C	E	F	G	V
S600-2600	1.800	3.242	186	152	Ø 12	1/2"	5 x 2,5	Ø 120	1"	1"
S600-3300	1.800	3.942	186	152	Ø 12	1/2"	5 x 2,5	Ø 120	1"	1"

